

LOG V-3

TARGET \_\_\_\_\_


COORD. LAT. \_\_\_\_\_

LONG. \_\_\_\_\_

DEBRIS FIELD ~~GREEN~~ WINGERS

NAME: F. LIVINGSTON

TAG #'S: V3A - E2008  
V3B - E2009  
V3C - E2010  
V3D - E2011  
V3E - E2012

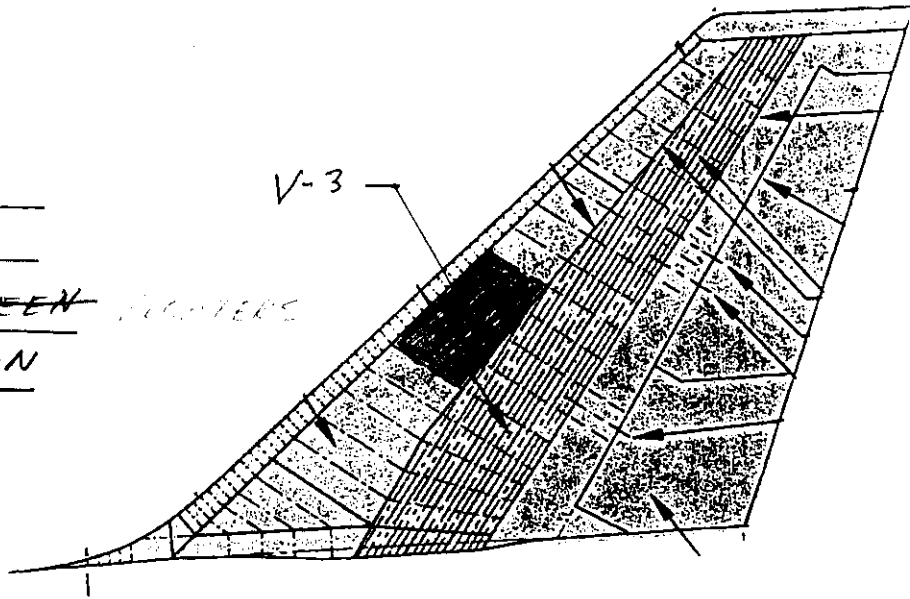

NOMENCLATURE: ALUMINUM/HONEYCOMB PANELS FORWARD  
 FRONT SPAR, LEFT SIDE, 1 EACH FIN STA 345 TO FIN STA 370, RIGHT SIDE, 4 EACH FIN STA 270 TO FIN STA 370.  
 V3B-V3E

DESCRIPTION: PANEL LEFT SIDE, FIN STA 345 - FIN STA 370.  
 PANEL INTACT WITH EDGE BENDING. PANEL ATTACHMENT SPLICE PLATES, SHEAR FAILURE AND RIVET HEADS POPPED OFF.

PANELS RIGHT SIDE, 4 EACH, FIN STA 345 TO FIN STA 270. PANELS DEFORMED AND TORN. LOWER TWO PANELS, FORWARD PORTION (APPROXIMATELY) 24 INCHES MISSING.

- a) ALL PANELS (5 EACH) ARE NOT ATTACHED TO STRUCTURE, ATTACHMENT FAILURE, SHEARED RIVETS, SHEARED SPLICE PLATE, POPPED RIVET HEADS.
- b) NO FIRE DAMAGE
- c) NO CORROSION
- d) FAILURES <sup>ARE DUE TO</sup> ~~TO BE~~ <sup>RD 12/13/96</sup> STATIC OVERLOAD ~~DUE TO~~ <sup>TO</sup> ~~RAPID WATER ENTRY.~~

*Forest E. Livingston* TWA 9-28-96  
*Scum* FAA 10-29-96  
*R. Harauer* 12/13/96  
 Tom Todino FAA 12-13-96

*W. J. ...* 12-16-96 WA

*Dennis Santiago* IAH  
 10-12-96 12-13-96

*R.S. - ACPA*  
 12-13-96