NATIONAL TRANSPORTATION SAFETY BOARD


Office of Aviation Safety Washington, D.C. 20594

Attachment 24 - UPS B747-400 Audio Control Panel

OPERATIONS/HUMAN PERFORMANCE SUPPORT TO THE U.S. ACCREDITED REPRESENTATIVE

DCA10RA092

Audio Panel

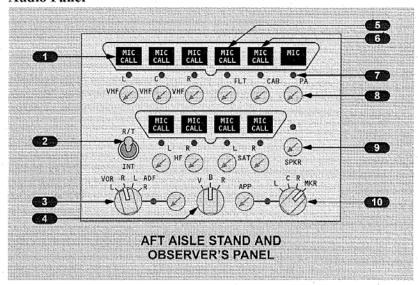

1. Transmitter Select Switches

Push -

- · MIC light illuminates
- MIC light for any other transmitter extinguishes
- Selects respective transmitter (radio or intercommunications) for transmission from this crew station (only one can be selected at a time for each crew station)
- Selects receiver audio on, if not previously selected on manually

2. Push-to-Talk Switch

 R/Γ - Keys boom microphone or oxygen mask microphone on the selected radio transmitter or interphone system.

Center - Off.

INT - Keys boom microphone or oxygen mask microphone on flight interphone.

Note: Oxygen mask microphone active when oxygen mask stowage box left-hand door open. Boom microphone active when oxygen mask stowage box left-hand door closed and Reset/Test slide lever pushed and released.