RGL Home

Supplemental Type Certificate

STC Number: SA1075SO

This certificate issued to: Stephenson William J

STC Holder's Address: Pro-Flite of Vero, Inc. P.O. Box 998 Vero Beach FL 32960 United States

Description of the Type Design Change: Wing-Ding door stop to be installed using existing screws(Piper P/N 415 309, MS27039-0809) on leading edge of right wing at inboard side of fuel cell(W.S. 57.00).

Application Date:

Status:

Issued, 05/18/1979

Responsible Office:

ACE-115A Atlanta Aircraft Certification Office Tel: (404) 474-5500

TC Number -- Make -- Model:

2A13 -- Piper Aircraft, Inc., The New -- PA-28R-200

2A13 -- Piper Aircraft, Inc., The New -- PA-28-151

2A13 -- Piper Aircraft, Inc., The New -- PA-28R-201

2A13 -- Piper Aircraft, Inc., The New -- PA-28R-201T

2A13 -- Piper Aircraft, Inc., The New -- PA-28-181

2A13 -- Piper Aircraft, Inc., The New -- PA-28-161

2A13 -- Piper Aircraft, Inc., The New -- PA-28-235

Full Text of STC:

▼Comments


Comments:

FAA.gov Home | Privacy Policy | Web Policies & Notices | Contact Us | Help

Readers & Viewers: PDF Reader | MS Word Viewer | MS PowerPoint Viewer | MS Excel Viewer | Zip



2004 - 2005 Parts Catalog > Page 16

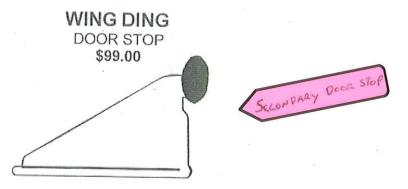

Stop wind burst from slamming entrance door into engine cowl / easy installation. 28-151, 161, 181, 28R-201, 28-235, STC1075SO

Sky Tec FLYWEIGHT STARTERS

	Models	Description	Motor Type	Spin	Weight	Street
Starters for Textron Lycoming E	ngines (FAA F	PMA)				
NEW DA	122-NL 149-NL 149-NLR	All-new Design. Recommended for all Lycoming engine applications including retractable Cessnas, Mooney M20 J, Air Conditioned Piper singles, short wing Pipers & More. Each starter is jumper-switchable between 12 and 24V	Wound Field	50% Faster than OEM	9.4 LBS	\$699
High-Torque Inline		between 12 and 24V				
Fly-Weight™ LS	122-12LS 149-12LS	The industry Standard! The lightest, best selling value starter on the market! Features include a bendixfree electromechanical actuation, light weight, high-torque permanent magnet motors, gear reduction and compact design.	Perm. Magnet	2X fast as OEM	7.8 LBS	\$595
Fly-Weight™ PM	122-12PM 149-12PM 122-24PM 149-24PM	The industry Standard! The lightest, best selling value starter on the market! Features include a bendixfree electromechanical actuation, light weight, high-torque permanent magnet motors, gear reduction and compact design.	Perm. Magnet	2X fast as OEM	7.8 LBS	\$595
PM Installation Accessories	PGC-540	Prop Governor Bracket Kit - Required for PM installations on 540-powered aircraft with CS propellors				\$30
generally not included for LS, HTI, or HT installations	BCE-6	Cable Extension - Required for installations when no slack is available in starter power cable				\$12



