



**VEHICLE FACTORS GROUP CHAIRMAN'S
FACTUAL REPORT**

Vehicle Attachment 7 - 2005 Ford – Airbag Control Module Download Report

Oxnard, CA

HWY15MH006

(9 pages)

IMPORTANT NOTICE: Robert Bosch LLC and the manufacturers whose vehicles are accessible using the CDR System urge end users to use the latest production release of the Crash Data Retrieval system software when viewing, printing or exporting any retrieved data from within the CDR program. Using the latest version of the CDR software is the best way to ensure that retrieved data has been translated using the most current information provided by the manufacturers of the vehicles supported by this product.

CDR File Information

| | |
|----------------------------|---|
| User Entered VIN | 1FDXF46P55E [REDACTED] |
| User | i.iunker |
| Case Number | ML-004-15 |
| EDR Data Imaging Date | 02/27/2015 |
| Crash Date | 02/24/2015 |
| Filename | 1FDXF46P55E [REDACTED]_ACM 2005 F450.CDRX |
| Saved on | Friday, February 27 2015 at 18:39:01 |
| Collected with CDR version | Crash Data Retrieval Tool 15.0 |
| Reported with CDR version | Crash Data Retrieval Tool 15.0 |
| EDR Device Type | Airbag Control Module |
| Event(s) recovered | Deployment |

Comments

2005 Ford F450 ACM

Data Limitations

Important Limitations on Bosch Crash Data Retrieval (CDR) Tool Capabilities.

Disclaimer: This Restraint Control Module (RCM) records longitudinal deceleration data for the purpose of understanding the input data the Restraint Control Module used to determine whether or not to deploy restraint devices. This module does not record vehicle speed, throttle position, brake on-off, and other data, which may be recorded in some 1999 model year and later General Motors modules. The deceleration data recorded by Ford's module during a crash can subsequently be mathematically integrated into a longitudinal Delta-V. Delta-V is the change in velocity during the recording time and is NOT the speed the vehicle was traveling before the accident, and is also not the Barrier Equivalent Velocity. The Bosch CDR Tool will read and interpret both acceleration in G's and Delta-V in mph. RCM's in Ford vehicles that can be read by the Bosch CDR tool are listed in the Bosch Help Files.

Important

If there is any question that the restraint system did not perform as it was designed to perform, please read the system only through the diagnostic link connector. The Bosch CDR kit provides an RCM interface cable to plug directly into the restraint control module. The Bosch CDR RCM Interface Cable connects only power, ground, and memory read pins to the relevant vehicle restraint control module. The other RCM pins normally connect to inputs, such as sensors, and outputs, such as airbags, are not connected when you use the RCM Interface Cable to plug directly into the module. Since the vehicle restraint control module is constantly monitoring airbag system readiness (when powered), it will detect that the sensors and airbags are not connected. The restraint control module may record a new diagnostic trouble code into memory for each device that is not connected. These new diagnostic trouble codes may record over previously written diagnostic trouble codes present prior to the accident and spoil evidence necessary to determine if the restraint system performed in the accident as it was designed to perform. Not only could this prevent Ford from being able to determine if the system performed as it was designed to perform, but, regardless of innocent inadvertence, you could raise issues of evidence spoliation in any litigation that may arise out of the accident. If you cannot read the module via the diagnostic link connector, and if you suspect improper system performance, contact Ford Motor Company and request their assistance to read the module with a proper vehicle simulator attached.

While data stored in RCM's is accurate, accident reconstructionists must be aware of the limitations of the data recorded in Ford's control modules and should compare the recorded data with the physical evidence at the accident scene using professional accident reconstruction techniques (i.e. vehicle crush characteristics, skid marks, etc) before making any assumptions about the import and validity of the data recorded in the module with respect to the crash event being analyzed. The following describes specific limitations that must be considered when analyzing recorded data. Investigators should obtain permission of the vehicle owner or have sufficient legal authority prior to reading any data.

1. There may be no deceleration data recorded in the module.

Loss of power (cut wires, damaged battery, crushed fuse box) to the module during or immediately after the crash may prevent the crash data from being recorded. A backup power supply within the module has sufficient power to continue to analyze the deceleration data and deploy restraint devices if needed, but there is no backup power for recording.

If the deceleration input does not create a vehicle longitudinal Delta-V above 4 mph within 100 milliseconds, there may not be any data recorded.

2. In unusual circumstances, deceleration data stored in the module may be from a crash other than the one you are currently analyzing.

The module will record data from some non-deploy events. If, after the module has recorded data from a non-deploy event, and there is a subsequent event in which there is a loss of power and no new recording is made for that subsequent event, the deceleration data in the module's memory may be from the prior event. If the new, subsequent event is a deploy event and recording has occurred, the deployment times should be recorded. If there are no deployment times recorded, but airbags or other restraint devices are observed to have deployed, the recorded data that you read are most likely from a prior event.

Once an airbag or other restraint device has been commanded to deploy, the data recorded in connection with that deployment are "locked", and subsequent crashes cannot be recorded.

If a vehicle is being repaired, the RCM should be replaced after any crash in which restraint devices deploy. Early printed shop manuals refer to re-using modules by clearing the "crash data memory full" code, but this is no longer true and the latest on-line electronic shop manual directs that modules be replaced.

Crashes that involve multiple impacts will record only one of the impacts. If there is a deployment, the deployment event will be recorded and locked. If no restraint device is commanded to deploy, the recorded data are not "locked", and subsequent impacts may record over any previous recorded data. Further analysis will be required to determine which of the events was actually recorded.

3. The computed longitudinal Delta-V may understate the total Delta-V

Many real-world crashes can last longer than the memory has the capacity to record. Therefore, the actual Delta-V of the event may be higher than the Delta-V calculated and displayed by the Bosch CDR System output. Review the end of the longitudinal acceleration/deceleration pulse - if it has not settled to zero G's by the end of the recording, the vehicle longitudinal Delta-V is most likely understated. If there is a clear decaying trend line you may choose, at your own risk, to estimate the total Delta-V by extrapolating the decay trend to zero and to calculate the additional Delta-V not captured.

Under some circumstances where power is interrupted, during the recording of data, or the module re-sets during the recording of data, a partial recording may occur. This will be shown as "no data" in the data table and will not be plotted on the graph of acceleration. When some portion of the acceleration data is not recorded, the Delta-V during that time cannot be calculated. A Delta-V will be calculated for the points that are valid, but the user must be aware that the partial Delta-V calculated will further underestimate the actual event total Delta-V.

4. This module records only longitudinal acceleration/deceleration of the vehicle. You must compute lateral or resultant total acceleration based on your estimated Principal Direction of Force (PDOF).

5. Vertical acceleration/decelerations are not recorded. Vehicle spin about a point not centered on the Restraints Control Module sensor may add or subtract from bu k vehicle motion.


6. This module is not intended to record acceleration/deceleration in a side-impact event. If the side impact generates a longitudinal deceleration component sufficient to wake up the frontal deployment algorithm, there may be a recording of longitudinal deceleration in a side impact event.

Any Longitudinal Delta-V determined by using data read from the air bag module should be verified with physical evidence from the crash (such as vehicle crush, skid marks) and assumed accident sequence. Multiple impacts, angular collisions, side impacts, vehicle spin, etc should be considered in addition to the data read from the air bag module.

02001_RCM-1_r002

System Status At Deployment

| | |
|--|--------------|
| Diagnostic codes active when event occurred | 0 |
| Passenger Airbag Switch Position During Event | Activated |
| Time From Side Safing Decision to Left (Driver) Side Bag Deployment (msec) | Not Deployed |
| Frontal and Pretensioner Fire time (ms) | 25.75 |

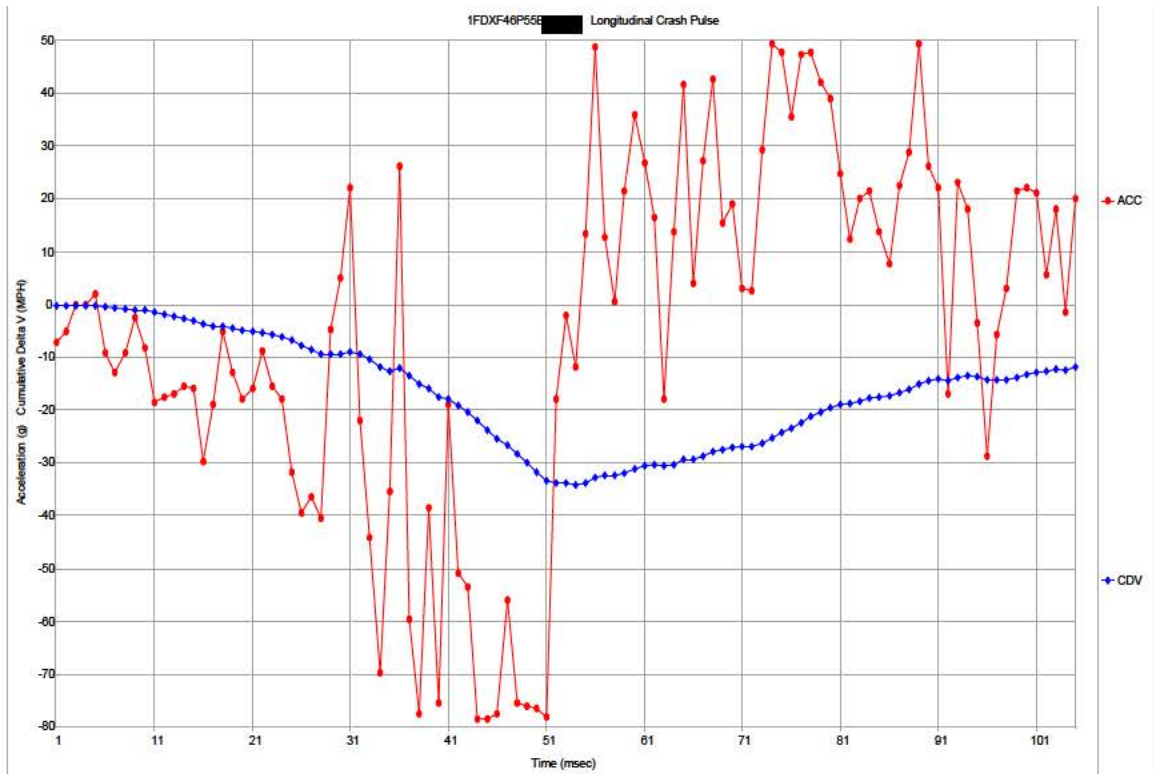

Crash Pulse Data

| Milliseconds | Long. Acceleration (Gs) | Long. Cumulative Delta V (MPH) |
|--------------|-------------------------|--------------------------------|
| 1 | -7.20 | -0.16 |
| 2 | -5.14 | -0.27 |
| 3 | 0.00 | -0.27 |
| 4 | 0.00 | -0.27 |
| 5 | 2.06 | -0.23 |
| 6 | -9.25 | -0.43 |
| 7 | -12.85 | -0.71 |
| 8 | -9.25 | -0.91 |
| 9 | -2.57 | -0.97 |
| 10 | -8.22 | -1.15 |
| 11 | -18.50 | -1.56 |
| 12 | -17.48 | -1.94 |
| 13 | -16.96 | -2.31 |
| 14 | -15.42 | -2.65 |
| 15 | -15.93 | -3.00 |
| 16 | -29.81 | -3.66 |
| 17 | -19.02 | -4.07 |
| 18 | -5.14 | -4.19 |
| 19 | -12.85 | -4.47 |
| 20 | -17.99 | -4.86 |
| 21 | -15.93 | -5.21 |
| 22 | -8.74 | -5.41 |
| 23 | -15.42 | -5.74 |
| 24 | -17.99 | -6.14 |
| 25 | -31.87 | -6.84 |
| 26 | -39.58 | -7.71 |
| 27 | -36.49 | -8.51 |
| 28 | -40.61 | -9.40 |
| 29 | -4.63 | -9.50 |
| 30 | 5.14 | -9.39 |
| 31 | 22.10 | -8.90 |
| 32 | -22.10 | -9.39 |
| 33 | -44.20 | -10.36 |
| 34 | -69.90 | -11.89 |
| 35 | -35.47 | -12.67 |
| 36 | 26.21 | -12.10 |
| 37 | -59.62 | -13.41 |
| 38 | -77.61 | -15.11 |
| 39 | -38.55 | -15.96 |
| 40 | -75.56 | -17.62 |
| 41 | -19.02 | -18.03 |
| 42 | -50.89 | -19.15 |
| 43 | -53.46 | -20.32 |
| 44 | -78.64 | -22.05 |
| 45 | -78.64 | -23.78 |
| 46 | -77.61 | -25.48 |
| 47 | -56.03 | -26.71 |
| 48 | -75.56 | -28.37 |
| 49 | -76.07 | -30.04 |

| Milliseconds | Long. Acceleration (Gs) | Long. Cumulative Delta V (MPH) |
|--------------|-------------------------|--------------------------------|
| 50 | -76.59 | -31.72 |
| 51 | -78.13 | -33.44 |
| 52 | -17.99 | -33.83 |
| 53 | -2.06 | -33.88 |
| 54 | -11.82 | -34.14 |
| 55 | 13.36 | -33.84 |
| 56 | 48.83 | -32.77 |
| 57 | 12.85 | -32.49 |
| 58 | 0.51 | -32.48 |
| 59 | 21.59 | -32.00 |
| 60 | 35.98 | -31.21 |
| 61 | 26.73 | -30.63 |
| 62 | 16.45 | -30.27 |
| 63 | -17.99 | -30.66 |
| 64 | 13.88 | -30.36 |
| 65 | 41.63 | -29.44 |
| 66 | 4.11 | -29.35 |
| 67 | 27.24 | -28.75 |
| 68 | 42.66 | -27.82 |
| 69 | 15.42 | -27.48 |
| 70 | 19.02 | -27.06 |
| 71 | 3.08 | -26.99 |
| 72 | 2.57 | -26.94 |
| 73 | 29.30 | -26.29 |
| 74 | 49.34 | -25.21 |
| 75 | 47.80 | -24.16 |
| 76 | 35.47 | -23.38 |
| 77 | 47.29 | -22.34 |
| 78 | 47.80 | -21.29 |
| 79 | 42.15 | -20.37 |
| 80 | 39.06 | -19.51 |
| 81 | 24.67 | -18.97 |
| 82 | 12.34 | -18.70 |
| 83 | 20.05 | -18.26 |
| 84 | 21.59 | -17.78 |
| 85 | 13.88 | -17.48 |
| 86 | 7.71 | -17.31 |
| 87 | 22.62 | -16.81 |
| 88 | 28.78 | -16.18 |
| 89 | 49.34 | -15.10 |
| 90 | 26.21 | -14.52 |
| 91 | 22.10 | -14.04 |
| 92 | -16.96 | -14.41 |
| 93 | 23.13 | -13.90 |
| 94 | 17.99 | -13.51 |
| 95 | -3.60 | -13.59 |
| 96 | -28.78 | -14.22 |
| 97 | -5.65 | -14.34 |
| 98 | 3.08 | -14.28 |
| 99 | 21.59 | -13.80 |
| 100 | 22.10 | -13.32 |

| Milliseconds | Long. Acceleration (Gs) | Long. Cumulative Delta V (MPH) |
|--------------|-------------------------|--------------------------------|
| 101 | 21.07 | -12.85 |
| 102 | 5.65 | -12.73 |
| 103 | 17.99 | -12.33 |
| 104 | -1.54 | -12.37 |
| 105 | 20.05 | -11.93 |

Hexadecimal Data

Data that the vehicle manufacturer has specified for data retrieval is shown in the hexadecimal data section of the CDR report. The hexadecimal data section of the CDR report may contain data that is not translated by the CDR program. The control module contains additional data that is not retrievable by the CDR system.

```
0800: A6 42 40 5F 14 A2 58 2D 0D 23 0F 2D 38 4C C8 FF
0810: 10 FF EF 13 3C 78 F1 9E 08 A2 F9 EF 19 99 52 49
0820: 2D 03 B3 43 1E 0A F5 0A A1 5E 03 0E 1D 1E 00 25
0830: 3C 3C 80 28 05 28 B6 07 28 18 08 08 03 84 B7 06
0840: 04 05 0B 05 AD 42 41 06 5E 00 64 00 B4 0B B8 03
0850: E8 09 60 11 30 05 78 09 60 17 70 00 78 00 CA 0E
0860: 74 11 30 03 20 00 08 00 0F 00 12 03 20 05 78 75
0870: 30 00 FA 00 17 03 20 07 D0 03 20 00 C8 04 45 01
0880: DC 00 12 00 DC 00 78 01 EF D0 1E 40 14 08 FA 3C
0890: 32 1C 32 EE 3C 28 5A B4 FA 6B 02 18 10 05 FF 20
08A0: 14 FF 50 01 6E DC 4F FF FF FF FF FF FF FF FF F5
08B0: FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
08C0: 04 FF FF FF FF FF 57 09 63 35 43 33 41 02 01 10
08D0: 0F FF 80 12 FF 80 33 FF 80 01 FF 80 2F FF 80 FF
08E0: 2F FF 00 02 FE 80 04 FF 80 09 FF 80 0A FF 80 FF
08F0: 17 86 04 00 00 80 0C FF FF FF FF FF FF FF 00 0C
0900: 06 11 44 04 10 92 FF FF FF 02 13 AA AA FF FF AA
0910: AA 90 08 76 26 FF FF 61 00 45 35 09 54 25 FF 04
0920: 8C 90 9A 9A 9E 88 81 88 95 8A 76 78 79 7C 7B 60
0930: 75 90 81 77 7B 89 7C 77 5C 4D 53 4B 91 A4 C5 6F
0940: 44 12 55 CD 26 03 4F 07 75 37 32 01 01 03 2D 07
0950: 06 05 02 77 96 83 B4 F9 B3 9B C4 E0 CE BA 77 B5
0960: EB A2 CF ED B8 BF A0 9F D3 FA F7 DF F6 F7 EC E6
0970: CA B2 C1 C4 B5 A9 C6 D2 FA CD C5 79 C7 BD 93 62
0980: 8F A0 C4 C5 C3 A5 BD 97 C1 00 00 00 00 00 00 00
0990: 02 00 00 40 9A F1 00 00 EA D1 00 67 00 00 00 00
09A0: 00 8B 00 62 00 42 00 26 00 42 00 4F 00 00 00 03
09B0: 00 68 00 00 00 67 00 C8 01 A3 00 00 00 00 00 00
09C0: 00 00 67 FF 00 FF FF 07 FA 00 FF FF FF FF FF FF
09D0: FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
09E0: FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
09F0: FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
```

Disclaimer of Liability

The users of the CDR product and reviewers of the CDR reports and exported data shall ensure that data and information supplied is applicable to the vehicle, vehicle's system(s) and the vehicle ECU. Robert Bosch LLC and all its directors, officers, employees and members shall not be liable for damages arising out of or related to incorrect, incomplete or misinterpreted software and/or data. Robert Bosch LLC expressly excludes all liability for incidental, consequential, special or punitive damages arising from or related to the CDR data, CDR software or use thereof.