

LOC I-FRG 111.9	APP CRS 146°	Rwy ldg TDZE Apt Elev	6157 77 80
---------------------------	------------------------	-----------------------------	---------------------------------------


ILS or LOC RWY 14

REPUBLIC (F/RG)

▽ Inop table does not apply to S-ILS 14. For inop MALS/R, increase S-LOC 14 Cats A/B visibility to 1, Cats C/D visibility to 1 $\frac{1}{2}$. Autopilot coupled approach NA below 310. When local altimeter setting not received, use Islip altimeter setting: increase S-ILS 14 DA to 314; increase all MDA 40 feet and Circling Cats C/D visibility $\frac{1}{4}$ mile; inop table does not apply to S-ILS 14 all Cats; for inop MALS/R, increase S-LOC 14 Cats A/B visibility to 1.


MALSR
MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct DPKVOR/DME and hold, continue climb-in-hold to 3000.

ATIS 126.65	NEW YORK APP CON 128.125 269.0	REPUBLIC TOWER ★ 118.8 (CTAF) 279.65	GND CON 121.6 269.6	CLNC DEL 128.25	UNICOM 122.95
-----------------------	--	--	-------------------------------	---------------------------	-------------------------

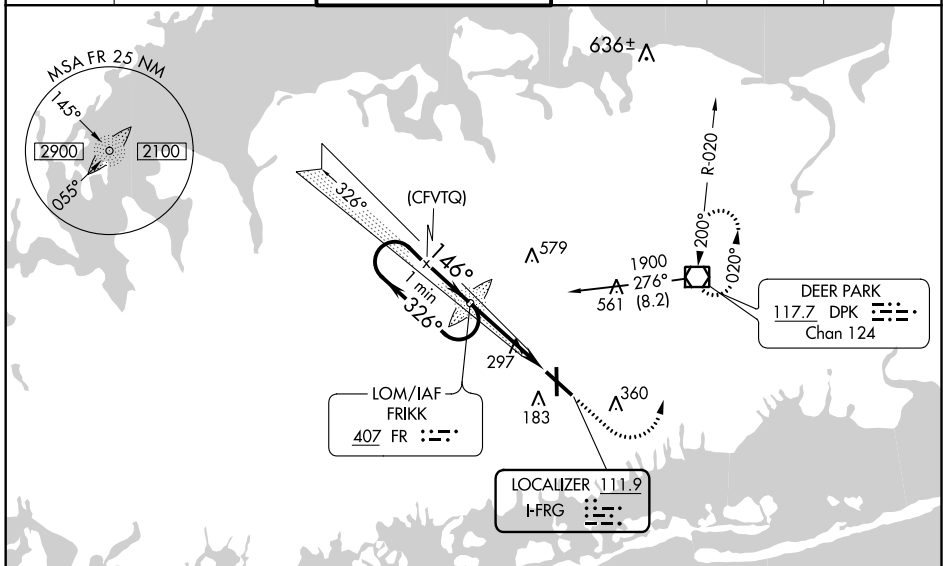

NE-2, 03 DEC 2020 to 31 DEC 2020

NE-2, 03 DEC 2020 to 31 DEC 2020

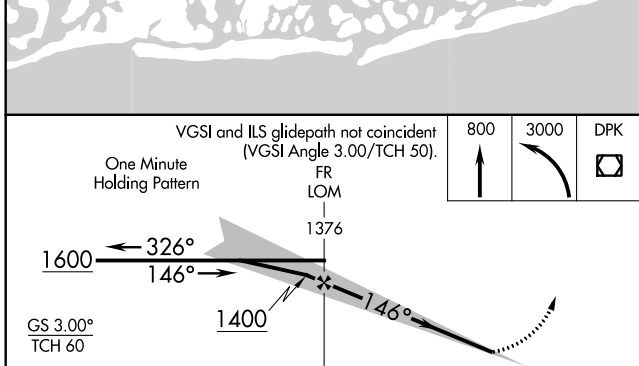

CATEGORY	A	B	C	D
S-ILS 14	277- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
S-LOC 14	560- $\frac{3}{4}$	483 (500- $\frac{3}{4}$)	560-1	483 (500-1)
CIRCLING	560-1 480 (500-1)	600-1 520 (600-1)	720-1 $\frac{3}{4}$ 640 (700-1 $\frac{3}{4}$)	720-2 640 (700-2)

