



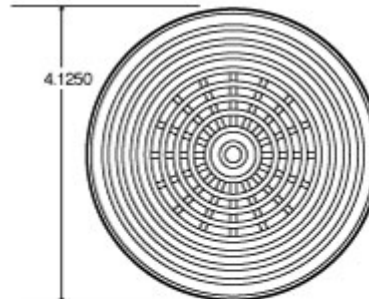

Self-Adjusting 4" Round Alarm

Material:
Urethane-filled housing



**REQUIRES 4.5 X 1.75
DEEP MOUNTING HOLE**

[Click to see larger image](#)



- Features a urethane-filled housing to protect the alarm from moisture, dust & vibration
- Alarm is flush mounted to help protect against road debris, salt & mud
- No additional tools required for installation or replacement
- Manufacturer's 24 month warranty
- Uses industry standard grommets & pigtailed
- Steam cleanable
- Voltage spike protected
- Meets OSHA, SAE J994, Bureau of Mines & all state regulations
- Operating temperatures range from -40 F to +170 F

Product	Part #	U/M	Std Ctn Qty
"Self-Adjusting" 77-97 db, 12-48 volts	92914-1	EA	1
"Self-Adjusting" 77-97db, 12-48 volts	92914	EA	1
Single sound 97 dB, 12 volts 'C'	92916	EA	1
Single sound 102 dB, 12-24 volts, type 'D'	92918	EA	1

PRIVACY & LEGAL

CONTACT TRUCK-LITE