

Rough Layout of Bridge, S-TRUST

SLANTED

CLOCK -
GYRO -
ECHO SCANNER -


REPEATERS & INDICATORS

- RATE OF TURN
- ENGINE REVOLUTION
- RUDDER ANGLE
- SPEED LOG
- ANEMOMETER
- INCLINOMETER

Location of security camera

Port Bridge Wing


Stbd Bridge Wing

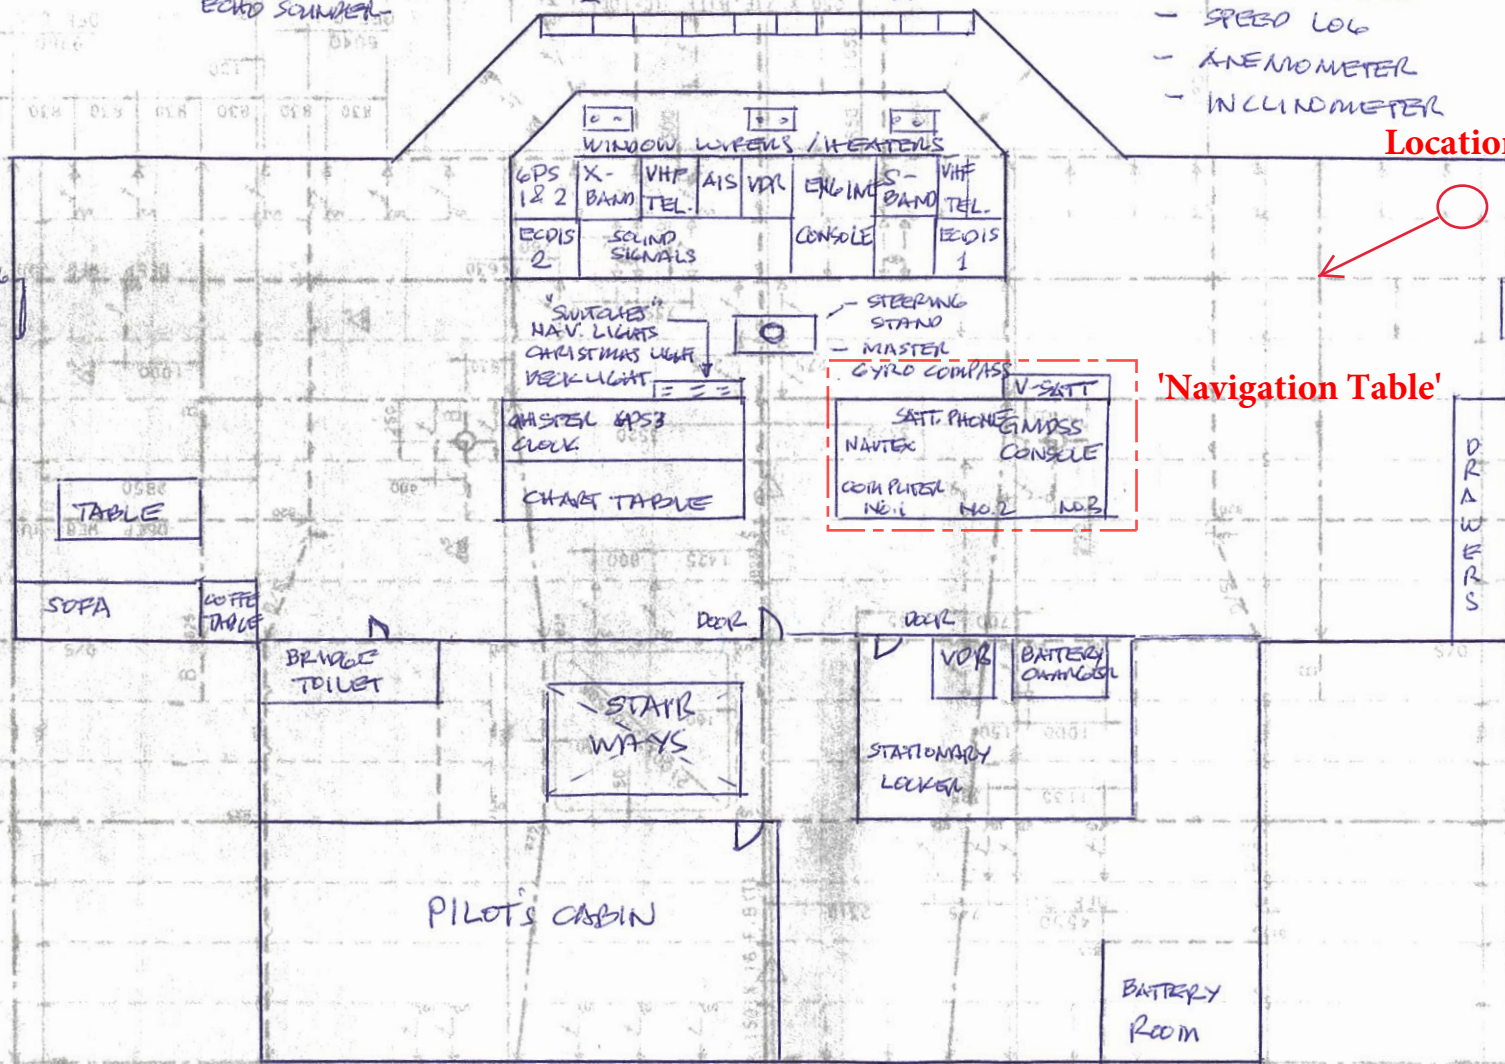


Stern

(2)

Rough Dimensions of Bridge, compared to previous layout

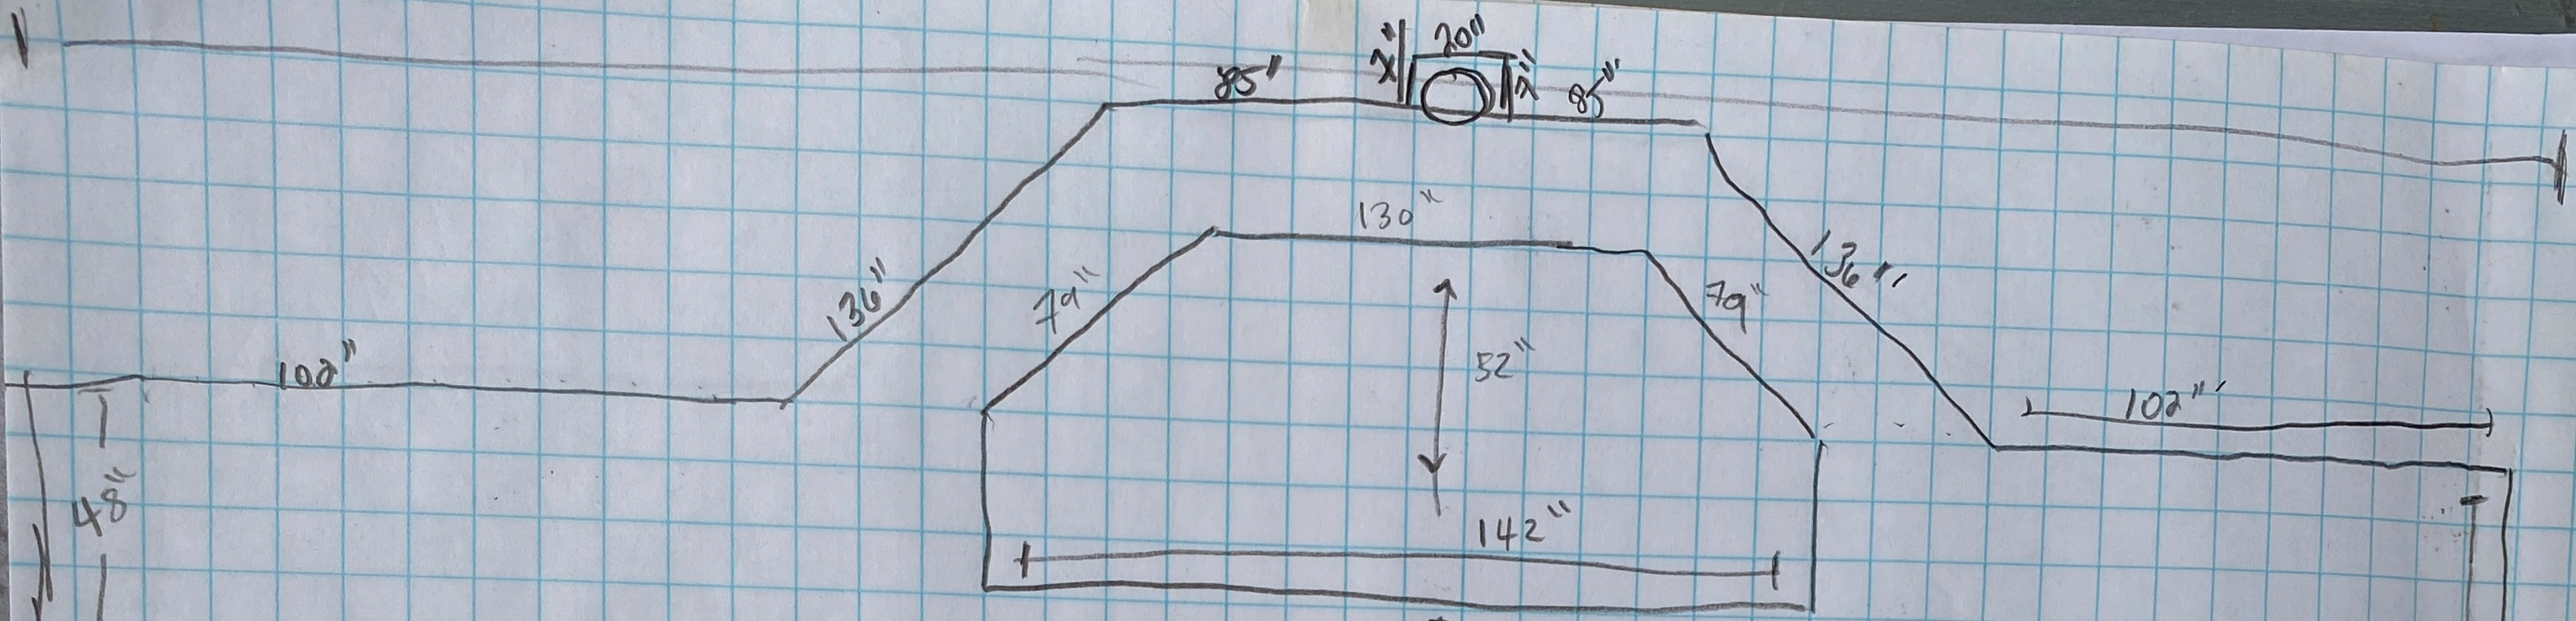

DOOR
SILL 2 6"
DOOR 2 7" WISE

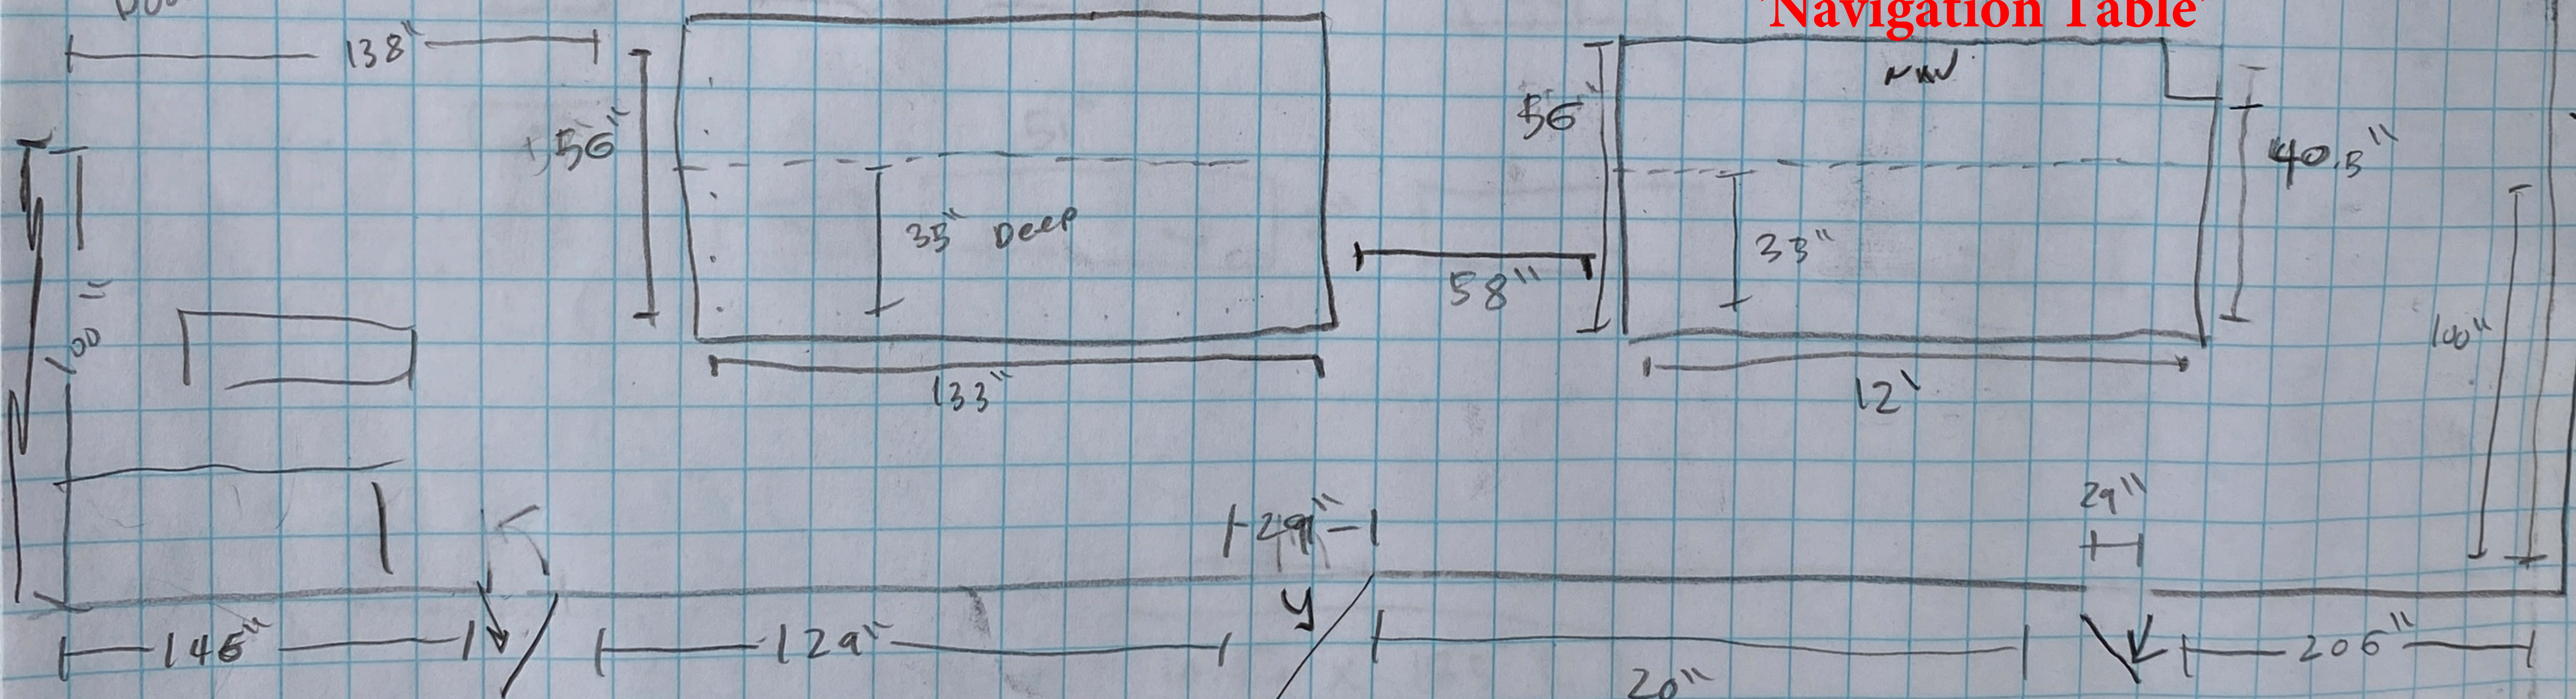

'Navigation Table'

BALLAST = 27" x 7"

29" w
x
75" H

Layout of 'Navigation Table', pre-fire

W/ Second Officer

NAV. TABLE


port / center of bridge

starboard

✓

P P

SAT
Phone
Fixed



H

NAVTEX

SAT
Phone

BAT₁ BAT₂

C₁

C₂

CPU
Full STAMP
Above COOP

Parameter
Box

LVDR / GROSS / SATC

Computer

Monitor

Monitor

Monitor

Key Board

Key BOARD

stern